

LINEAR LIGHT LED LINEAR ACCENT LIGHT



Project:

Location:

Cat No:

Type:

Qty:

Notes:

About:


Extruded aluminum linear light with suspended and surface mounting options meeting the highest requirement in terms of architecture and lighting technology.

SKU: AOLF-LR-004-LAA001-04-1.8

| LUMENS | CCT | CRI | BEAM ANGLE | MOUNTING | FINISH |
|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> |
| 21-2100 (30w) | 27-2700K | 80-80 | 15-15° | MS-Surface | AN-Anodized Aluminum |
| 22-2200 (30W) | 30-3000K | 90-90 | 30-30° | MP-Suspended | WH-White |
| 24-2400 (30W) | 40-4000K | | 35x15-35°x15° | | BL-Black |

LINEAR LIGHT
LED LINEAR ACCENT LIGHT

Dimensions

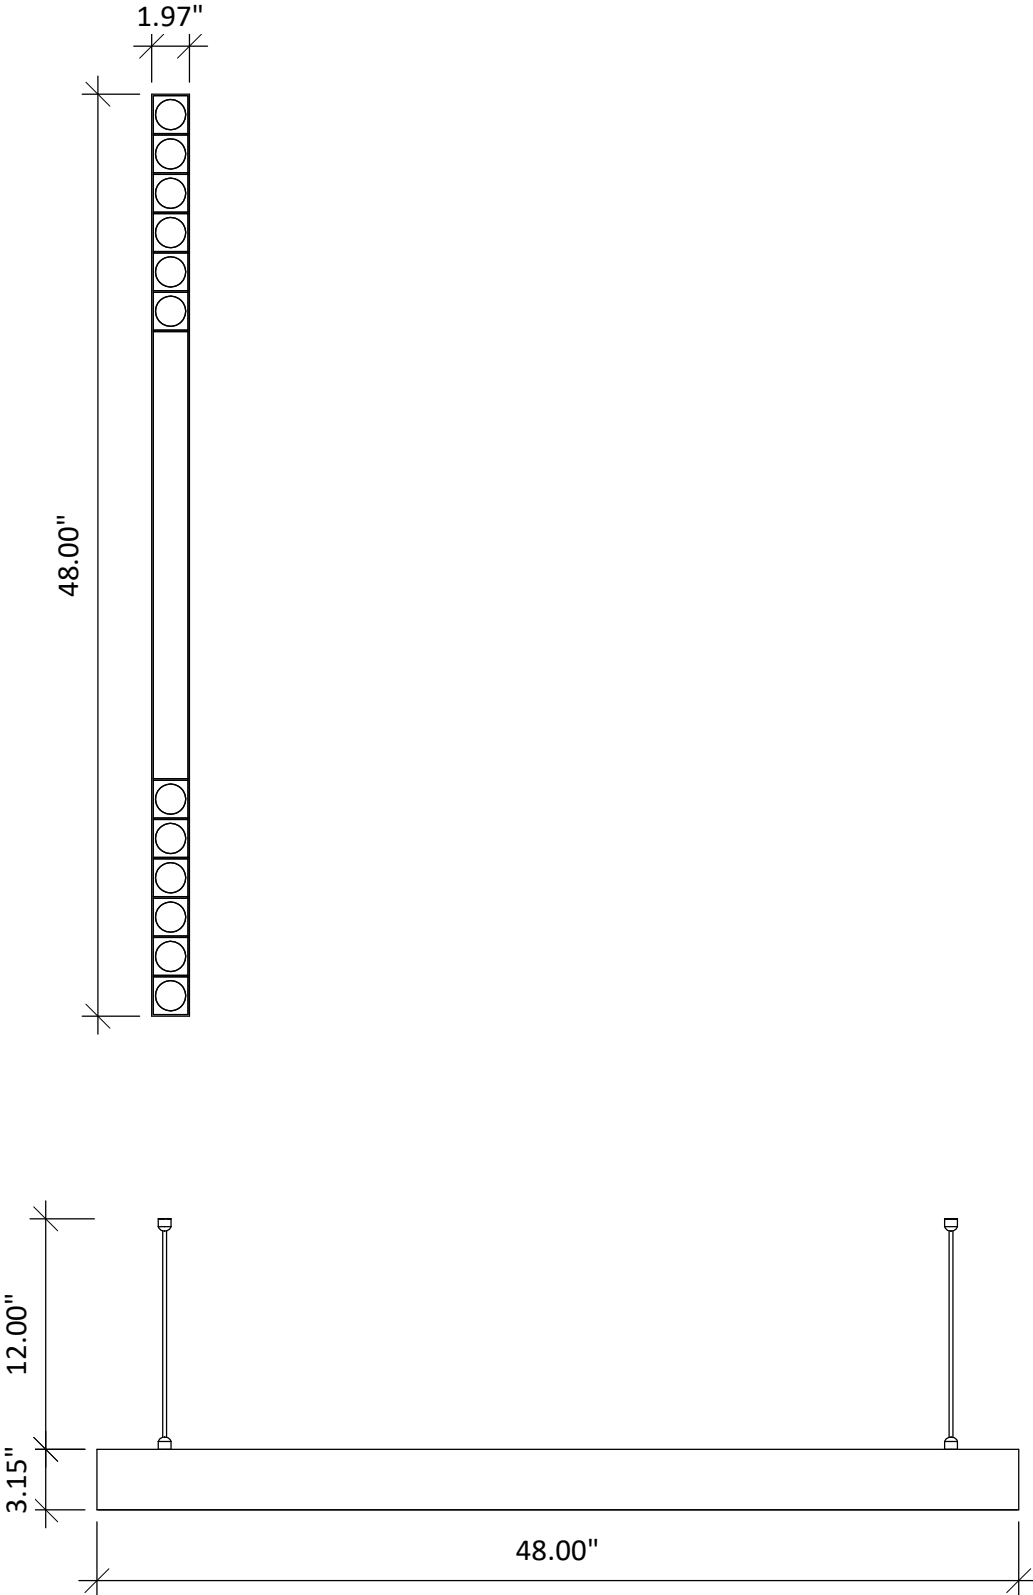

LINEAR LIGHT LED LINEAR ACCENT LIGHT

FEATURES:

- Profile system made of extruded aluminum.
- Various lighting modules for multiple lighting applications.
- Tool-free inserts mounting by clip-in mechanism.
- Standard and customized length of module and cover.
- Magnetic end caps.
- The end of the front profile and the open end of the following profile can be seamlessly connected.

APPLICATION:

- Hotel Lobby, Hallways, offices, Meeting rooms, conference rooms, etc.

WARRANTY:

- 3 Years

TECHNICAL CHARACTERSTICS:

| | |
|----------------------|---------------------|
| Input Voltage | 100V to 277V AC |
| Input Power | 30W |
| Material | Die-Cast Aluminum |
| UGR | <19 |
| Beam Angle | 15°, 30°, 35° x 15° |
| Mounting Options | Surface, Suspended |
| Safety Certification | ETL, cETL, DLC |