

EMERGENCY LIGHT

LED DUAL HEAD EMERGENCY LIGHT



Project:

Location:

Cat No:

Type:

Qty:

Notes:

About:

Injection molded emergency lights with thermoplastic ABS housing operating at 32°F to 104°F that best suits your needs.


SKU: AOLF-EM-009-MAT001-2W-90-ABS

Material	Injection-Molded Thermoplastic ABS Housing
Fire Rating	UL 94 V-0 Flame Rating, Fire-Resistant
Input Voltage	120V to 277V AC
Power Consumption	4.5W Max.
Output	1.6W Max.
Battery	3.6V Nickel Cadmium Battery
Charging Time	24 Hours
Discharge Time	90 Minutes
Operating Temperature	32°F to 104°F
Certificate	UL

EMERGENCY LIGHT

LED DUAL HEAD EMERGENCY LIGHT

Dimensions

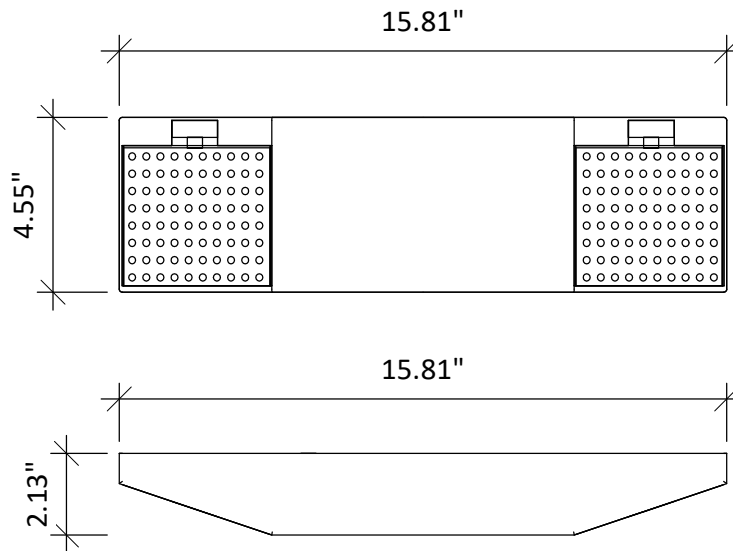

LIGHT DISTRIBUTION

