

LINEAR WALL WASHER

EXTERIOR LED LINEAR WALL WASHER LIGHT



Project:

Location:

Cat No:

Type:

Qty:

Notes:

About:

Light that provides a sense of safety in parking lots and walkways with superior luminaries for all your changing project needs. A design best suited for lighting distribution across the parking area.


SKU: AOLF-SP-018-BAA001-1.6-WT-11-30-MS (RGBW)

SIZE	WATER RESISTANCE	LUMENS	BEAM ANGLE	MOUNTING
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
1.6-1.6'	WT	11-1125 (25W)	10-10°	MS
	WT-Wet Rated			MS-Surface Mounting
3.2-3.2'		22-2250 (50W)	15-15°	
			25-25°	
			30-30°	
			40-40°	
			60-60°	
			100-100°	
			10x30-10°x30°	
			10x45-10°x45°	
			10x65-10°x65°	
			20x65-20°x65°	


TRI-PROOF LIGHT

LED EXTERIOR TRI-PROOF LIGHT

50 Watt

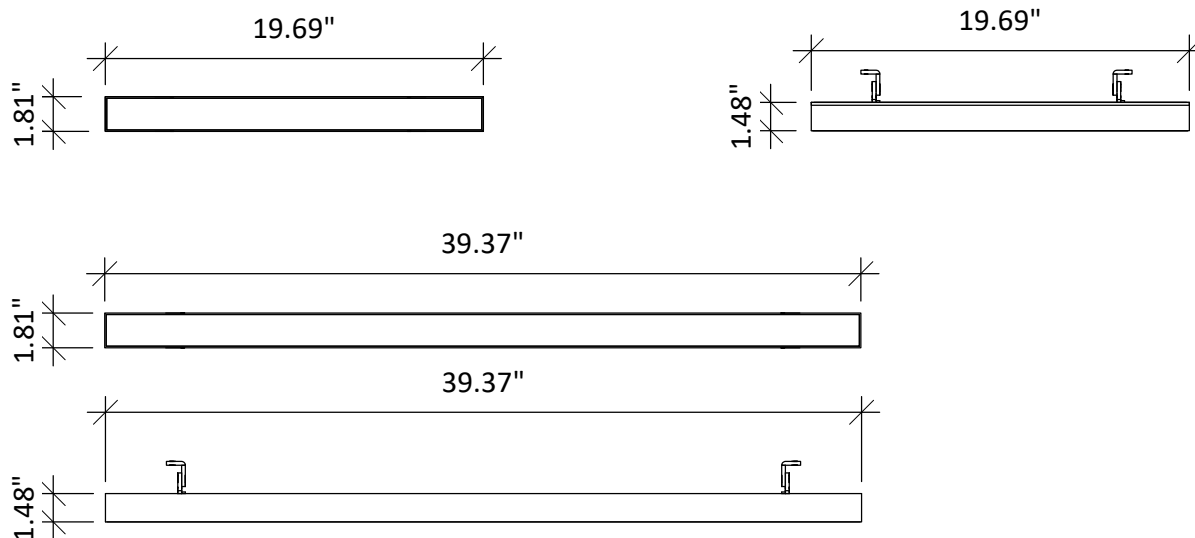

LIGHT DISTRIBUTION

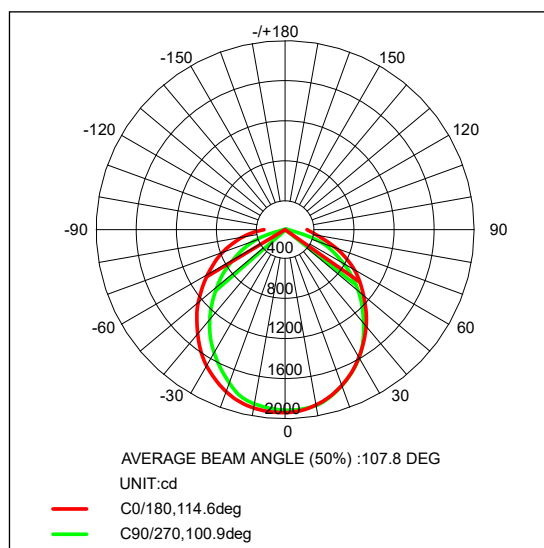

TRI-PROOF LIGHT

LED EXTERIOR TRI-PROOF LIGHT

FEATURES:

- Excels in a wide range of lighting applications including flood lighting, spot lighting, wall grazing, and wall washing.
- Top quality LED lens, top performance for lighting distribution
- Can work with DMX512 system and wireless control system
- Water resistance of IP66

APPLICATION:

- Bridges, commercial buildings, warehouses, etc.

WARRANTY:

- 3 Years

TECHNICAL CHARACTERSTICS:

Input Voltage	100V to 277V AC
Input Power	25W, 50W
Water Resistance	IP66
Length Options	1.64Ft., 3.2Ft.
Safety Certification	cETL (5008838), CE, and RoHS