

TRI-PROOF LIGHT

LED EXTERIOR TRI-PROOF LIGHT



Project:

Location:

Cat No:

Type:

Qty:

Notes:

About:




Light that provides a sense of safety in parking lots and walkways with superior luminaries for all your changing project needs. A design best suited for lighting distribution across the parking area.

SKU: AOLF-SP-015-BAA001-2-WT-26-60-DIM-MS-2LC

SIZE	WATER RESISTANCE	LUMENS	CCT
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
2-2'	WT WT-Wet Rated	26-2600 (20W)	30-3000K
4-4'		52-5200 (40W)	40-4000K
5-5'		65-6500 (50W)	50-5000K
		78-7800 (60W)	60-6000K

DIMMING	MOUNTING	ACCESSORIES
<input type="text"/>	<input type="text"/>	<input type="text"/>
DIM - 0-10V	MS-Surface Mounting	Blank-None
	MP-Suspended Mounting	2LC-2' Linkable Connector
		4LC-4' Linkable Connector
		5LC-5' Linkable Connector

TRI-PROOF LIGHT
LED EXTERIOR TRI-PROOF LIGHT

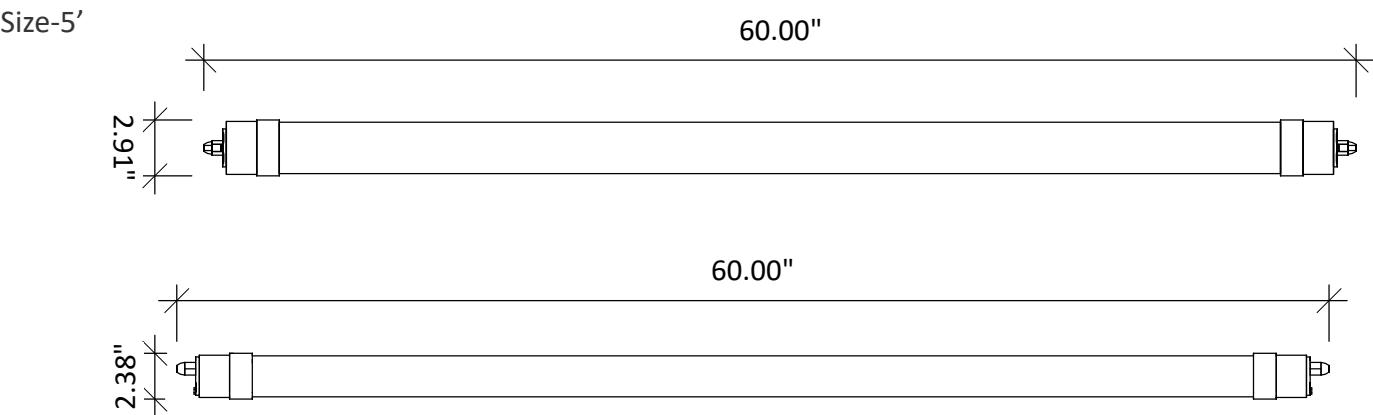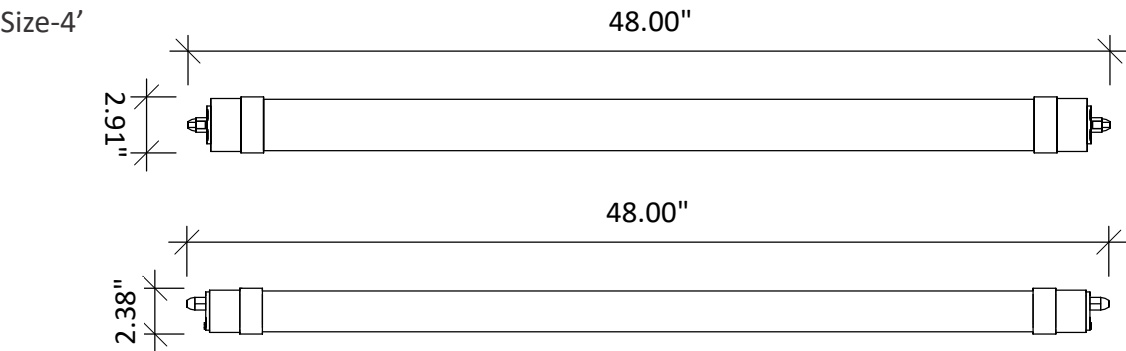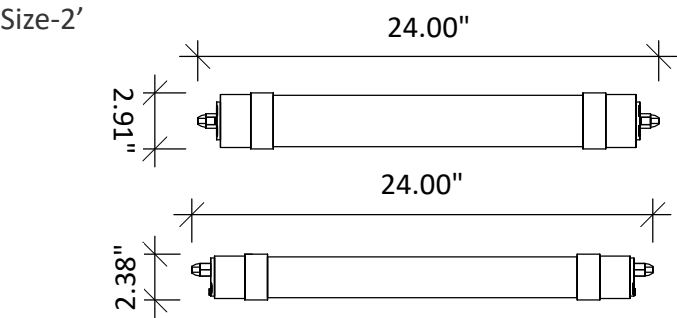

TRI-PROOF LIGHT

LED EXTERIOR TRI-PROOF LIGHT

FEATURES:

- Easy to assemble and disassemble with convenient mounting buckles.
- Ideal for moisture, wet, and dusty environment.
- Equipped with respirator to prevent water vapor from inside the body
- Water resistance rating of IP66

APPLICATION:

- Parkings, tunnels, corridors, galleries, etc.

WARRANTY:

- 5 Years

TECHNICAL CHARACTERSTICS:

Input Voltage	100V to 277V AC; 50/60Hz
Lens	Clear Cover, Milky Cover
Lifespan	50,000 Hours
Installation	Surface and Suspended Mounted
CRI	>80
Operating Temperature	-4°F to 122°F
Storage Temperature	-40°F to 185°F
Safety Certification	ETL, cETL, and DLC