

FLOOD LIGHT

LED FLOOD LIGHT



Project:

Location:

Cat No:

Type:

Qty:

Notes:

About:


Just the perfect light that dissipates higher lumens per watt, perfectly illuminating the wider areas. This LED is better than any other conventional lights.

SKU: AOLF-FL-017-CAA001-101-40-DIM-PC-120-BL

LUMENS	CCT	DIMMING	OPTIONS	SURGE PROTECTION	BEAM ANGLE	FINISH
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text" value="120"/>	<input type="text"/>
101-10140 (80W)	40-4000K	Blank-None	Blank-None	Blank-Without Surge Protection	120-120°	BL-Black
127-12740 (100W)	50-5000K	DIM - 0-10V	PC-Photocell	SP-Surge Protection		WH-White
150-15080 (120W)			MO-Motion Sensor			BZ-Bronze
184-18460 (150W)						
295-29500 (225W)						
403-40300 (310W)						

FLOOD LIGHT LED FLOOD LIGHT

Dimensions

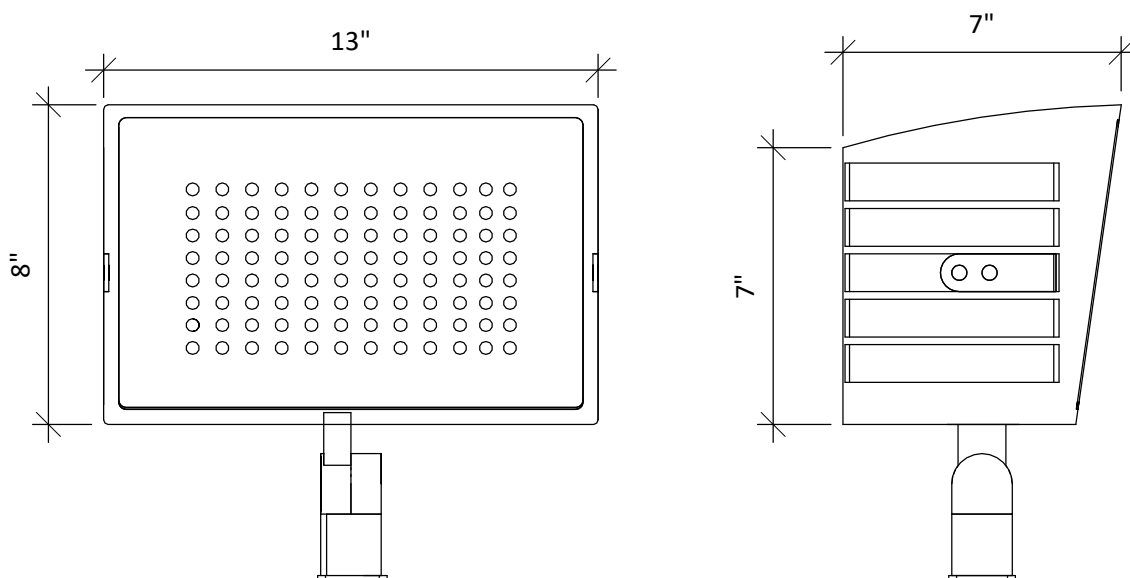

FEATURES:

- High quality LED chips.
- Optimized thermal management with die-cast aluminum housing .
- Tamper and shatter-resistant glass.
- Water resistance rating of IP66, suitable for both indoor and outdoor projects.

APPLICATION:

- Facades, landscapes, public places, residential complexes, hospitality, etc.

WARRANTY:

- 6 Years

TECHNICAL CHARACTERSTICS:

Material	Die-Cast Aluminum Housing
Input Voltage	100V to 277V AC; 50/60Hz
CRI	≥75
Power Factor	>0.9
IP Rating	IP65
Operating Temperature	-31°F to 131°F
Sensors	Photocell Sensor, Motion Sensor
Safety Certification	UL/cUL, DLC Listed