

## CANOPY LIGHT

### GENERAL GARAGE AND CANOPY LIGHT



Project:

Location:

Cat No:

Type:

Qty:

Notes:


### About:

Energy efficient LED garage and canopy light with uniform light distribution perfect for parking garage lighting, entryway, canopy, etc.

SKU: AOLF-GC-017-GAA001-S

LUMENS	CCT	RATING	DIMMING	OPTION	FINISH
<input type="text"/>	<input type="text" value="50"/>	<input type="text" value="WT"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
27-2700 (20W)	50-5000K	WT - Wet	Blank - None	Blank-None	BL - Black
37-3700 (30W)			DIM-0-10V	PC-Photocell	WH-White
50-5000 (40W)				MO-Motion Sensor	BZ- Bronze
71-7100 (55W)				EM-Emergency	
100-10000 (80W)				PCEM-Photocell with Emergency	
				MOEM-Motion Sensor with Emergency	

## CANOPY LIGHT GENERAL GARAGE AND CANOPY LIGHT

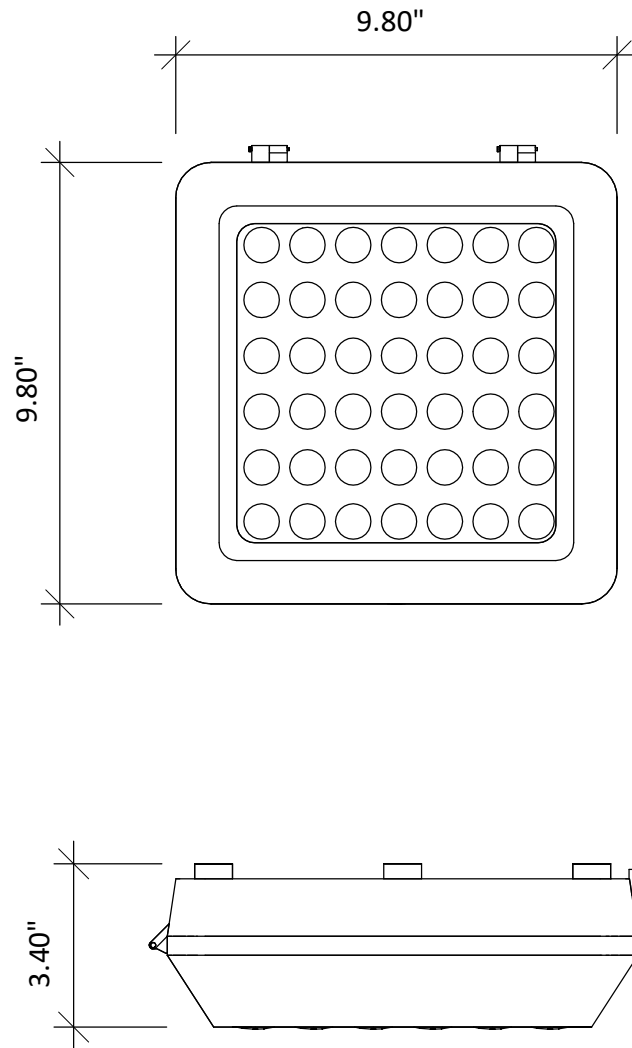

## CANOPY LIGHT

### GENERAL GARAGE AND CANOPY LIGHT

#### FEATURES:

- Unique Optical lens for uniform light distribution on the ground and increased luminous efficacy.
- Optimized thermal design for effective heat dissipation.
- Aluminum (ADC 12) die-cast housing for higher thermal conductivity.
- Quick and easy installation and maintenance.
- Optional photocell, motion sensor, and emergency functions available.
- Water resistance with IP65 rating.

#### APPLICATION:

- Garage, entryways, gas stations, canopy, etc.

#### WARRANTY:

- 5 Years

#### TECHNICAL CHARACTERSTICS:

Housing Material	High Purity Aluminum (ADC 12) Die-Cast Housing
Beam Angle	90°x120°, 120°, 90°, 85°x135°, 90°x140°, 100°x140°
Input Voltage	100V to 277V AC; 50/60Hz
Input Power	20W, 30W, 40W, 55W, 80W
Dimmable	0-10V
Sensors	Photocell/Motion Sensor Available
IP Rating	IP65
Operating Temperature	-31°F to 158°F
Dimension	9.8" L x 9.8" W x 3.4" H
Safety Certification	UL/cUL(E352762), DLC Premium 4.3 Listed