

LANDSCAPE LIGHT LED LANDSCAPE FLOOD LIGHT



Project:

Location:

Cat No:

Type:

Qty:

Notes:



About:

A light specially crafted to add to the aesthetic appeal of an outdoor space by highlighting the architectural details and enhancing its beauty.

SKU: AOLF-LS-017-NAA001-13-30-SH-22-BL

LUMENS	CCT	ACCESSORIES	BEAM ANGLE	FINISH
<input type="text"/> 13-1380 (12W)	<input type="text"/> 27-2700K	<input type="text"/> Blank-None	<input type="text"/> 22-22°	<input type="text"/> BL-Black
<input type="text"/> 32-3200 (30W)	<input type="text"/> 30-3000K	<input type="text"/> SH-Shroud	<input type="text"/> 35-35°	<input type="text"/> WH-White
<input type="text"/> 46-4600 (40W)	<input type="text"/> 40-4000K	<input type="text"/>	<input type="text"/> 57-57°	<input type="text"/> BZ-Bronze
	<input type="text"/> 50-5000K	<input type="text"/>		

Dimensions

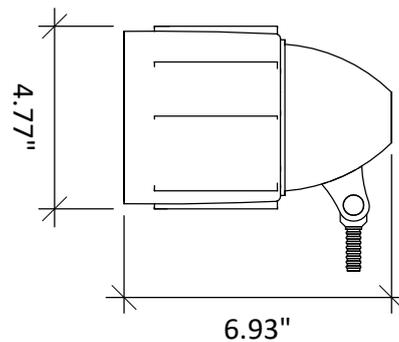

LANDSCAPE LIGHT LED LANDSCAPE FLOOD LIGHT

FEATURES:

- Energy-efficient directional lighting for landscape, facade, outdoor signage and many other commercial and residential applications.
- Water resistance rating of IP65, sealed to prevent dirt and moisture.
- Constructed with precise die-cast aluminum housing with integral cooling fin.
- Waterproof and durable high-temperature silicone gasket.

APPLICATION:

- Landscapes, facades, outdoor signages, etc.

WARRANTY:

- 5 Years

TECHNICAL CHARACTERSTICS:

Material	Die-Cast Aluminum Housing
Input Power	12W, 30W, 40W
Input Voltage	100V to 277V AC
Efficiency	120Lm/W
Power Factor	≥0.909
CRI	≥75
Water Resistance	IP65
Operating Temperature	-22°F to 113°F
Lifespan	>100,000 Hours
Certifications	UL/cUL (E352762), DLC Premium