

LINEAR LIGHT LED WRAPAROUND LIGHT



Project:

Location:

Cat No:

Type:

Qty:

Notes:

About:


Perfect energy-efficient and cost-effective wrap around light designed for basic utility and commercial applications.

SKU: AOLF-LR-002-LAB001-04-S-9.7

LUMENS	CCT	CRI	DIMMING	MOUNTING	FINISH
<div>28-2860 (22W)</div>	<div>35-3500K</div>	<div>80</div> <div>80-80</div>	<div>DIM</div> <div>DIM - 0-10V</div>	<div>MS</div> <div>MS-Surface</div>	<div>WH</div> <div>WH-White</div>
39-3900 (30W)	40-4000K				
52-5200 (40W)	50-5000K				
59-5980 (46W)					

LINEAR LIGHT LED WRAPAROUND LIGHT

Dimensions

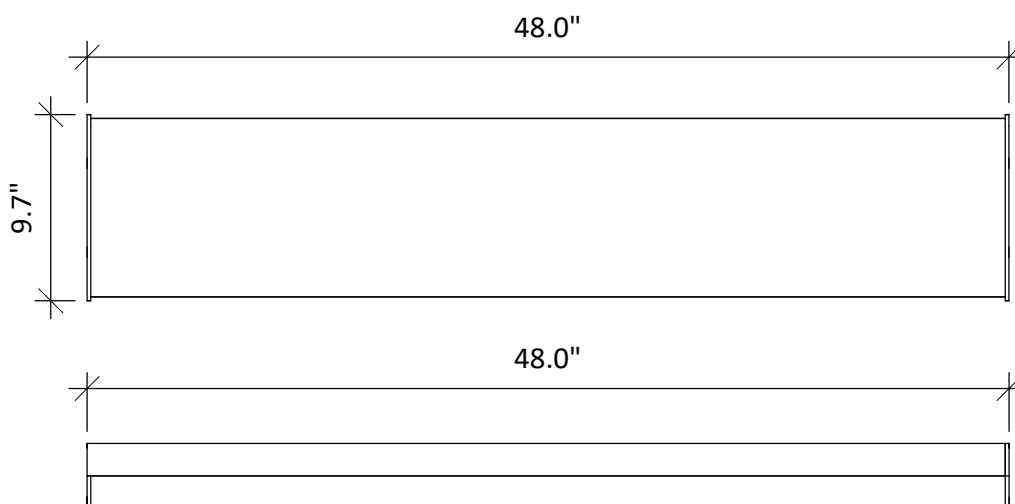

FEATURES:

- Designed with high efficacy LED engine to get the most energy savings.
- Suitable for damp locations.
- Continuous type 0-10V dimming can dim 10%-100%.

APPLICATION:

- Offices, Utility rooms, Multifunction rooms, Hallways, etc.

WARRANTY:

- 5 Years

TECHNICAL CHARACTERSTICS:

Input Power	22W, 30W, 40W, 46W
Input Voltage	120V to 277V AC
Frequency	50/60 Hz
Efficacy	130lm/w for 5000K
Operating Temperature	-4°F to 122°F
Lifespan	>100,000 Hours
Water Resistance	Damp Rated
Mounting	Surface
Certifications	UL 1598, UL 8750, DLC Listed